



60xx

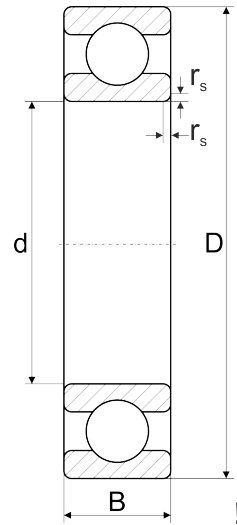


Bezeichnung Code	Dimensionen Dimensions				Tragzahl Load rating	Max. Drehzahl Max. speed	Gewicht Weight
SWC	d	D	B	r _s min	C ₀		!
	[mm]	[mm]	[mm]	[mm]	[kN]	[min ⁻¹]	[kg]
6000	10	26	8	0,3	1,96	250	0,019
6001	12	28	8	0,3	2,36	220	0,020
6002	15	32	9	0,3	2,85	190	0,031
6003	17	35	10	0,3	3,25	170	0,038
6004	20	42	12	0,6	5,00	150	0,068
6005	25	47	12	0,6	5,85	130	0,080
6006	30	55	13	1,0	8,00	120	0,122
6007	35	62	14	1,0	10,4	100	0,157
6008	40	68	15	1,0	11,8	90	0,194
6009	45	75	16	1,0	14,3	80	0,247
6010	50	80	16	1,0	15,6	80	0,272
6011	55	90	18	1,1	21,2	70	0,397
6012	60	95	18	1,1	23,2	60	0,404
6013	65	100	18	1,1	25,0	50	0,411
6014	70	110	20	1,1	31,0	50	0,594
6015	75	115	20	1,1	33,5	50	0,639
6016	80	125	22	1,1	40,0	50	0,844
6017	85	130	22	1,1	43,0	50	0,880
6018	90	140	24	1,5	50,0	50	1,010
6019	95	145	24	1,5	54,0	50	1,070
6020	100	150	24	1,5	54,0	50	1,140

62xx

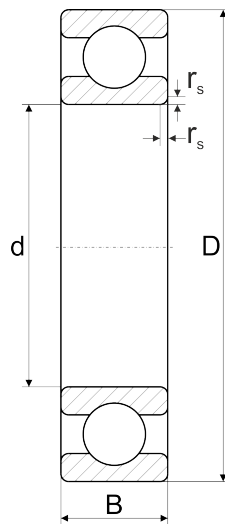

Bezeichnung Code	Dimensionen Dimensions				Tragzahl Load rating	Max. Drehzahl Max. speed	Gewicht Weight
	d	D	B	r _s min	C ₀		! [kg]
SWC	[mm]	[mm]	[mm]	[mm]	[kN]	[min ⁻¹]	
6200	10	30	9	0,6	2,60	230	0,031
6201	12	32	10	0,6	3,10	200	0,037
6202	15	35	11	0,6	3,75	180	0,043
6203	17	40	12	0,6	4,75	160	0,065
6204	20	47	14	1,0	6,55	140	0,105
6205	25	52	15	1,0	7,80	130	0,128
6206	30	62	16	1,0	11,2	110	0,195
6207	35	72	17	1,1	15,3	90	0,291
6208	40	80	18	1,1	18,0	80	0,371
6209	45	85	19	1,1	20,4	80	0,429
6210	50	90	20	1,1	24,0	70	0,466
6211	55	100	21	1,5	29,0	60	0,616
6212	60	110	22	1,5	36,0	50	0,789
6213	65	120	23	1,5	41,5	50	0,980
6214	70	125	24	1,5	44,0	50	1,060
6215	75	130	25	1,5	49,0	50	1,170
6216	80	140	26	2,0	53,0	50	1,390
6217	85	150	28	2,0	64,0	50	1,780
6218	90	160	30	2	72,0	50	2,140
6219	95	170	32	2,1	81,5	50	2,610
6220	100	180	34	2,1	93,0	50	3,130

63xx

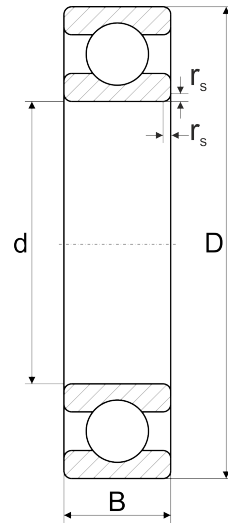

Bezeichnung Code	Dimensionen Dimensions				Tragzahl Load rating	Max. Drehzahl Max. speed	Gewicht Weight
SWC	d	D	B	r _s min	C ₀		
	[mm]	[mm]	[mm]	[mm]	[kN]	[min ⁻¹]	[kg]
6300	10	35	11	0,6	3,45	200	0,055
6301	12	37	12	1,0	4,15	190	0,062
6302	15	42	13	1,0	5,40	170	0,088
6303	17	47	14	1,0	6,55	150	0,114
6304	20	52	15	1,1	7,80	140	0,151
6305	25	62	17	1,1	11,4	120	0,234
6306	30	72	19	1,1	16,3	100	0,355
6307	35	80	21	1,5	19,0	90	0,471
6308	40	90	23	1,5	25,0	80	0,640
6309	45	100	25	1,5	32,0	70	0,847
6310	50	110	27	2,0	38,0	60	1,100
6311	55	120	29	2,0	47,5	60	1,390
6312	60	130	31	2,1	52,0	50	1,750
6313	65	140	33	2,1	60,0	50	2,070
6314	70	150	35	2,1	68,0	50	2,510
6315	75	160	37	2,1	76,5	50	3,010
6316	80	170	39	2,1	86,5	50	3,580
6317	85	180	41	3,0	96,5	50	4,220
6318	90	190	43	3,0	102,0	50	4,900
6319	95	200	45	3,0	112,0	50	5,660
6320	100	215	47	3,0	134,0	50	6,990